


689-D



Weight	≤2.0kg	
Operating Conditions: temperature range	-18℃ ~ +50℃	
Air Humidity	Not above 95%	
Air Pressure	70kPa ~ 110kPa	
Working Gas	Medical oxygen and air	
Gas Supply Pressure	0.28MPa ~ 0.48MPa (with differential pressure between two sources less than 0.2MPa)	
Flow-adjustable output	Range: 0~25 L/min Accuracy: ±1 L/min for 0~25 L/min (included);	
Flow-fixed output	100 L/min	Accuracy: ±10%
Oxygen Concentration:	21%~100%	Oxygen Accuracy: ±5% (V/V)

(1) 1bar=100kPa (2) 1mbar=100Pa

Amoul®

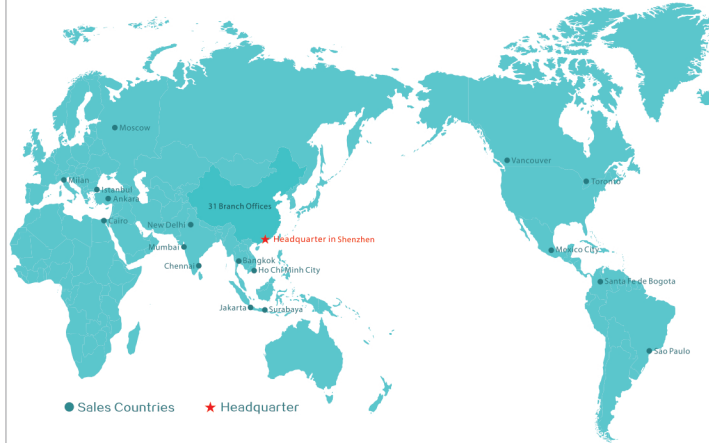

Ambulanc is one of the leading global manufacturer of Emergency and Transport ventilators. We are dedicated to innovation in the fields of emergency and hospital transportation for ventilation.

Headquartered in Shenzhen, China, Ambulanc possesses a sound distribution and service network with our distributors in more than 60 countries in North and Latin America, Europe, Africa and Asia-Pacific. While improving the quality of the products and service, we help in reducing its cost to save human lives in emergency.

Since its foundation in 2001, Ambulanc's development has been driven by innovation with strong R&D inspired by the needs of our customers, we adopt advanced technologies and transform them into accessible innovation, bringing emergency solution for peoples.

Ambulanc(shenzhen)Tech.Co.,Ltd. CE 0123



Add: 3th Floor, Block C, Building #5, Skyworth Innovation Industry Park, Tang Tou 1st Road, Shiyan Town, Baoan District, Shenzhen 518108, China.
Tel: +86-755 26073861 Fax: +86-755 23016012
Web site: www.ambulgroup.com E-mail: info@ambu-lanc.com

Amoul®



689 - Blender Series

www.ambulgroup.com

Amoul®

Amoul NCPAP , mixing air and oxygen, controlling the oxygen concentration and the flow, provide the mixed air to the patient, Amoul NCPAP series is to provide safe and effective nasal continuous positive airway pressure (NCPAP) for neonatal (including very low birth weight newborns). It can be used for Neonatology, Pediatrics, NICU and PICU.

689-B



Weight	≤2.0kg	
Operating Conditions: temperature range	-18℃ ~ +50℃	
Air Humidity	Not above 95%	
Air Pressure	70kPa ~ 110kPa	
Working Gas	Medical oxygen and air	
Gas Supply Pressure	0.28MPa ~ 0.48MPa (with differential pressure between two sources less than 0.2MPa)	
Flow-adjustable output	Range: 2~20 L/min Accuracy: ±1 L/min for 2~5 L/min (included); ±10% for 5~20 L/min	
Flow-fixed output	100 L/min	Accuracy: ±10%
Oxygen Concentration:	21%~100%	Oxygen Accuracy: ±5% (V/V)

689-C



Weight	≤2.0kg	
Operating Conditions: temperature range	-18℃ ~ +50℃	
Air Humidity	Not above 95%	
Air Pressure	70kPa ~ 110kPa	
Working Gas	Medical oxygen and air	
Gas Supply Pressure	0.28MPa ~ 0.48MPa (with differential pressure between two sources less than 0.2MPa)	
Flow-adjustable output	Range: 0~20 L/min Accuracy: ±1 L/min for 0~5 L/min (included); ±10% for 5~20 L/min	
Flow-fixed output	100 L/min	Accuracy: ±10%
Oxygen Concentration:	21%~100%	Oxygen Accuracy: ±5% (V/V)

(1) 1bar=100kPa (2) 1mbar=100Pa

689-C (double)



Weight	≤2.0kg	
Operating Conditions: temperature range	-18℃ ~ +50℃	
Air Humidity	Not above 95%	
Air Pressure	70kPa ~ 110kPa	
Working Gas	Medical oxygen and air	
Gas Supply Pressure	0.28MPa ~ 0.48MPa (with differential pressure between two sources less than 0.2MPa)	
Flow-adjustable output	Range: 0~15 L/min Accuracy: ±1 L/min for 0~5 L/min (included); ±10% for 5~15 L/min	
Flow-fixed output	100 L/min	Accuracy: ±10%
Oxygen Concentration:	21%~100%	Oxygen Accuracy: ±5% (V/V)